



product parameter




Weight resistance	≤5T
size	400*450*80mm
Up high	400mm
Width	450mm
Drop height	80mm
Outdoor protection	IP67
Product material	2.5mm cold-roll steel sheets
Up and down time	5s-6s
Remote distance	30-50m
Nominal voltage	DC6V
Quiescent current(MA)	≤0.85Ah
Environment temperature	-30°C ~+70°C
Package size	45*45*10cm(A set of cartons)
Weight	8.2KG

You can choose from two control methods



Remote control inductor

Two kinds of power supply

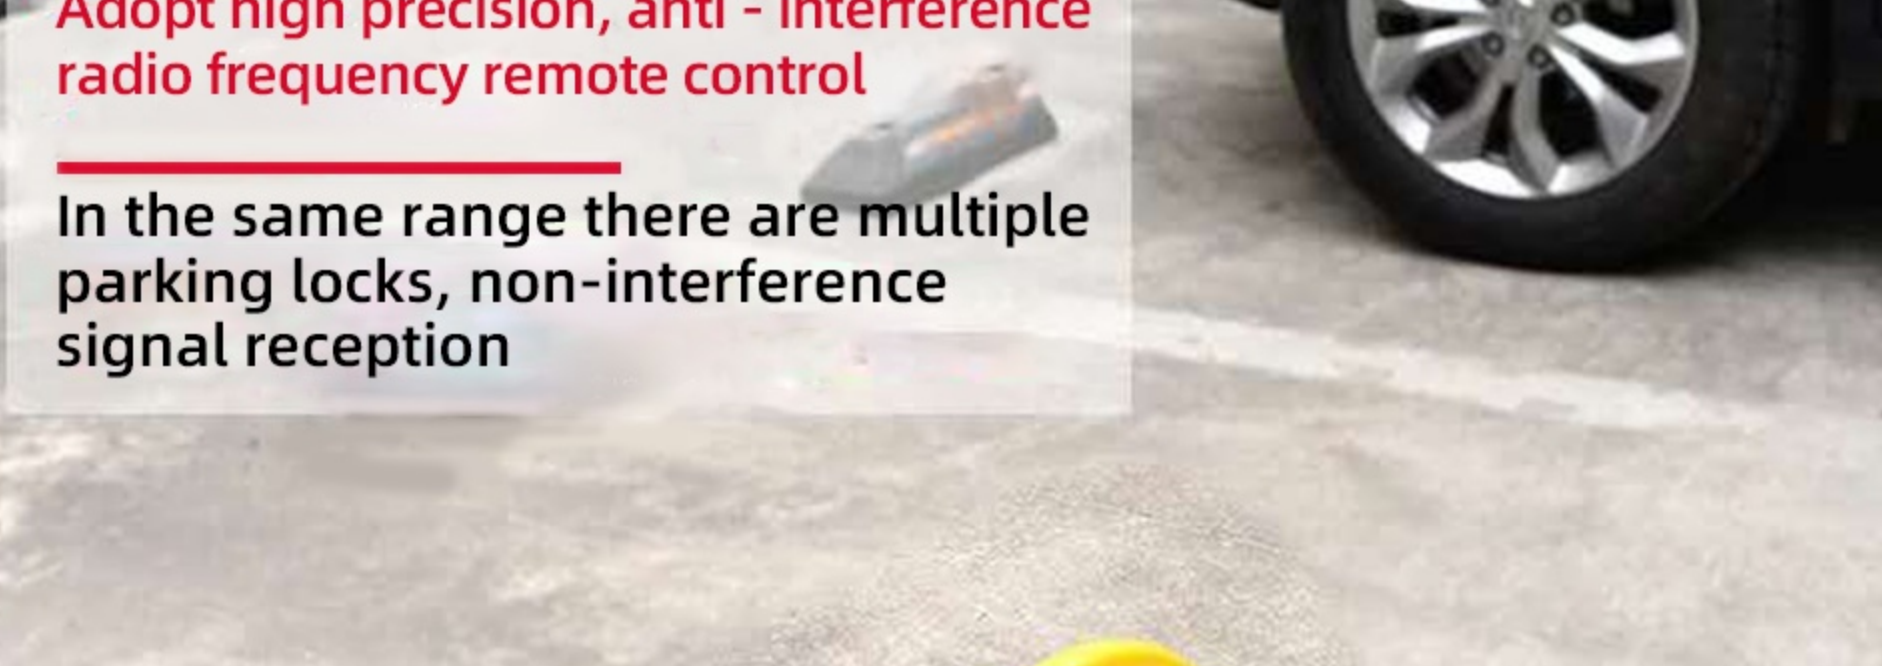


power supply mode	lithium battery	dry battery
charge mode	can recharged repeatedly	Not rechargeable, disposable use
Use cycle	Charge for 4 hours and use for 6-8 months	Use for about 6 months
Using the environment	(-2.0 °C - +75°C)	(-2.0 °C - +55°C)

controls the distance of 30-50m

Remote control lifting

Adopt high precision, anti - interference radio frequency remote control


In the same range there are multiple signal reception

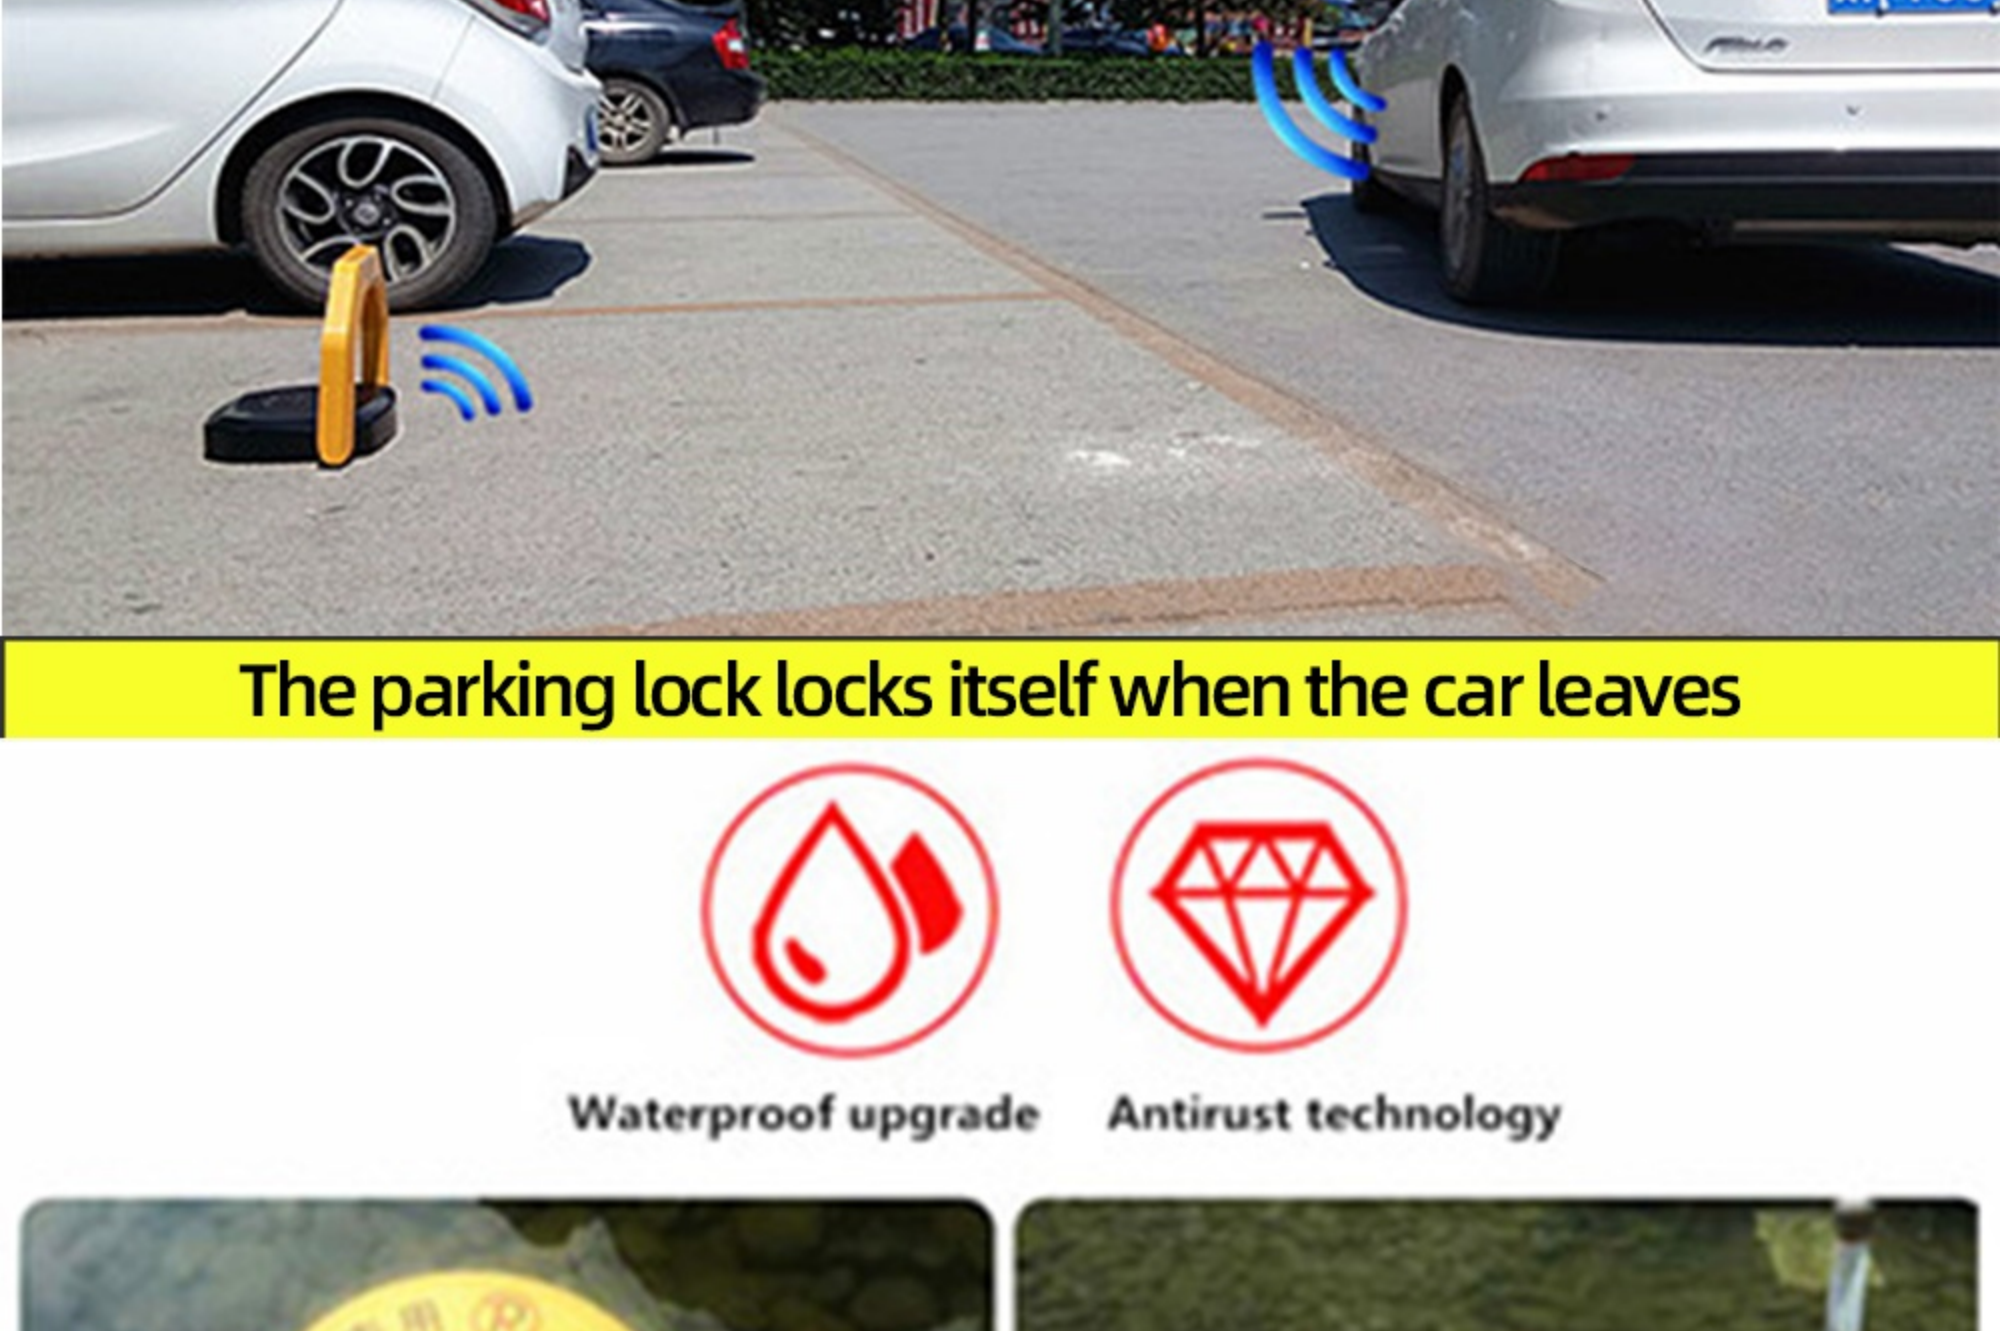

Automatic induction

Connect the receiver to the cigarette lighter in the car, realize automatic induction, so that you do not have to carry the remote control, convenient and fast.

The parking lock unlocks automatically when the car arrives

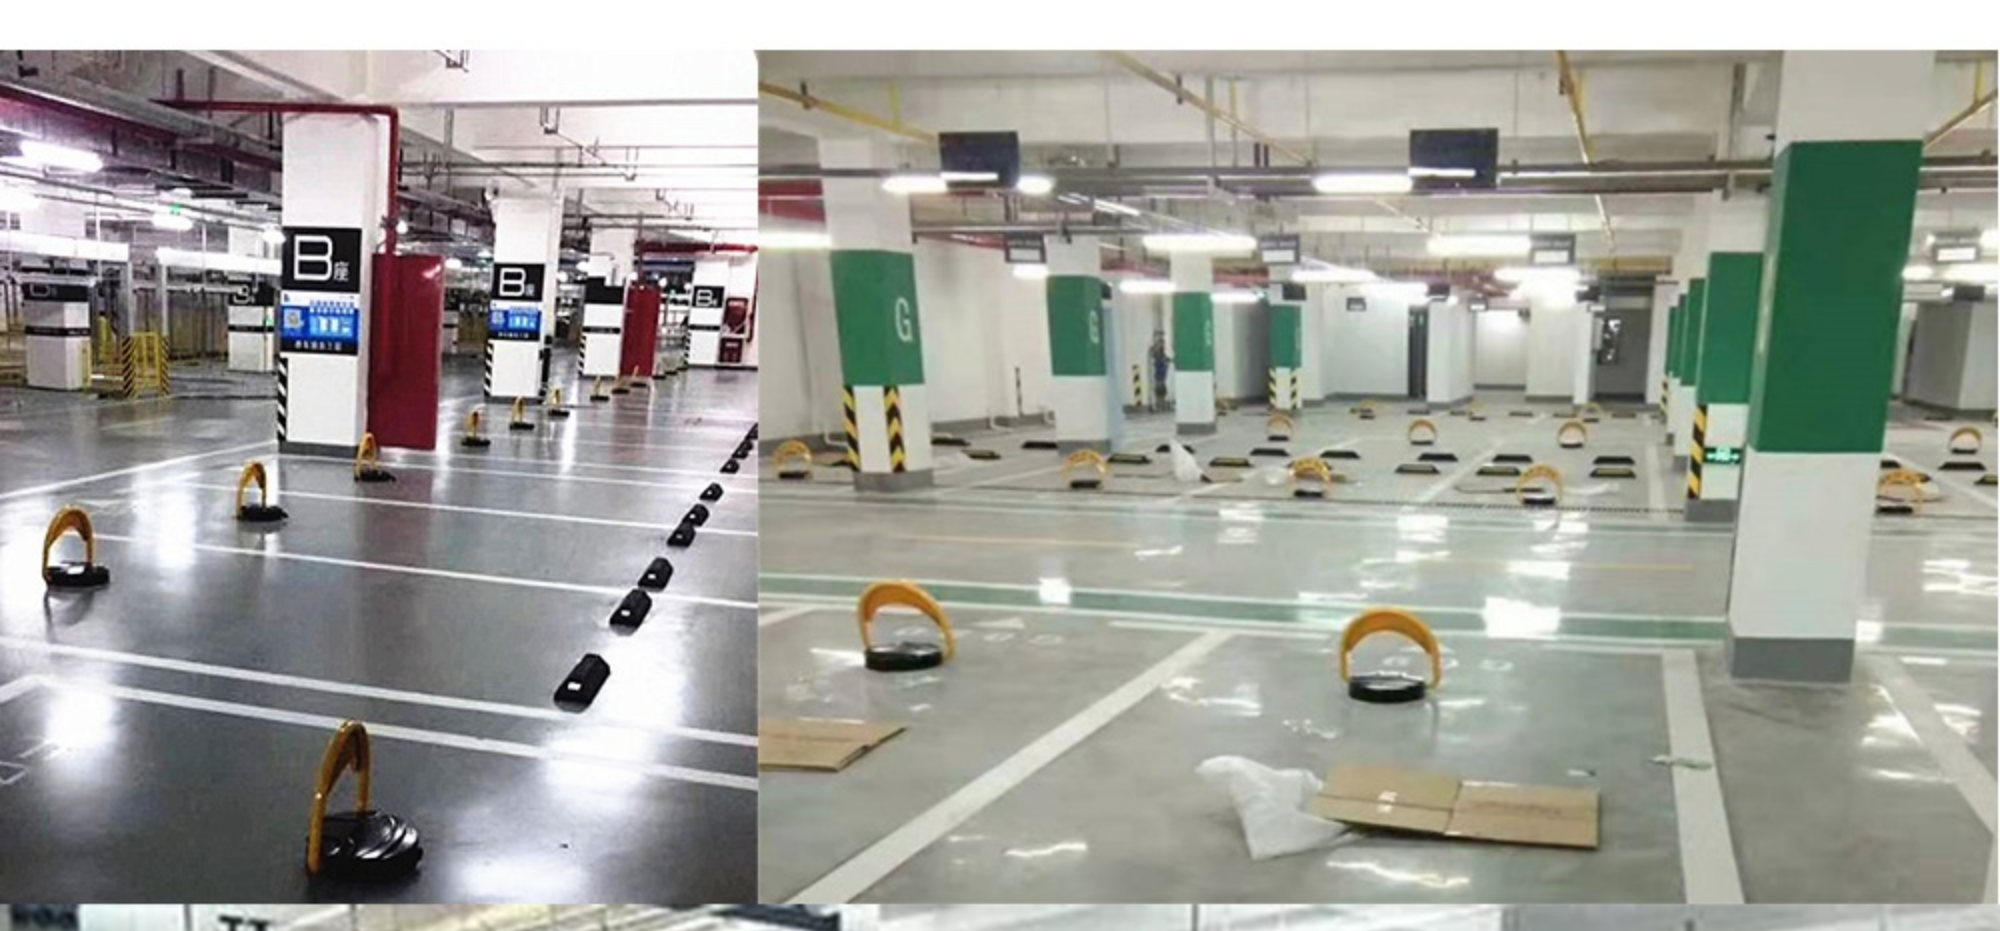

The parking lock locks itself when the car leaves



180° Put a collision


The parking lock has flexible design and self-protection function. It can rotate back and forth to protect itself from external collisions. The parking lock will also sound an alarm.




Heavy and durable

The shell is rolled in high quality steel and can withstand Max. It weighs 5 tons. Use spray plastic coating, waterproof, rust, dust, can be used in bad weather for about 5 years. The swing arm, made of steel, does not deform even when crushed by a vehicle

Show scenes

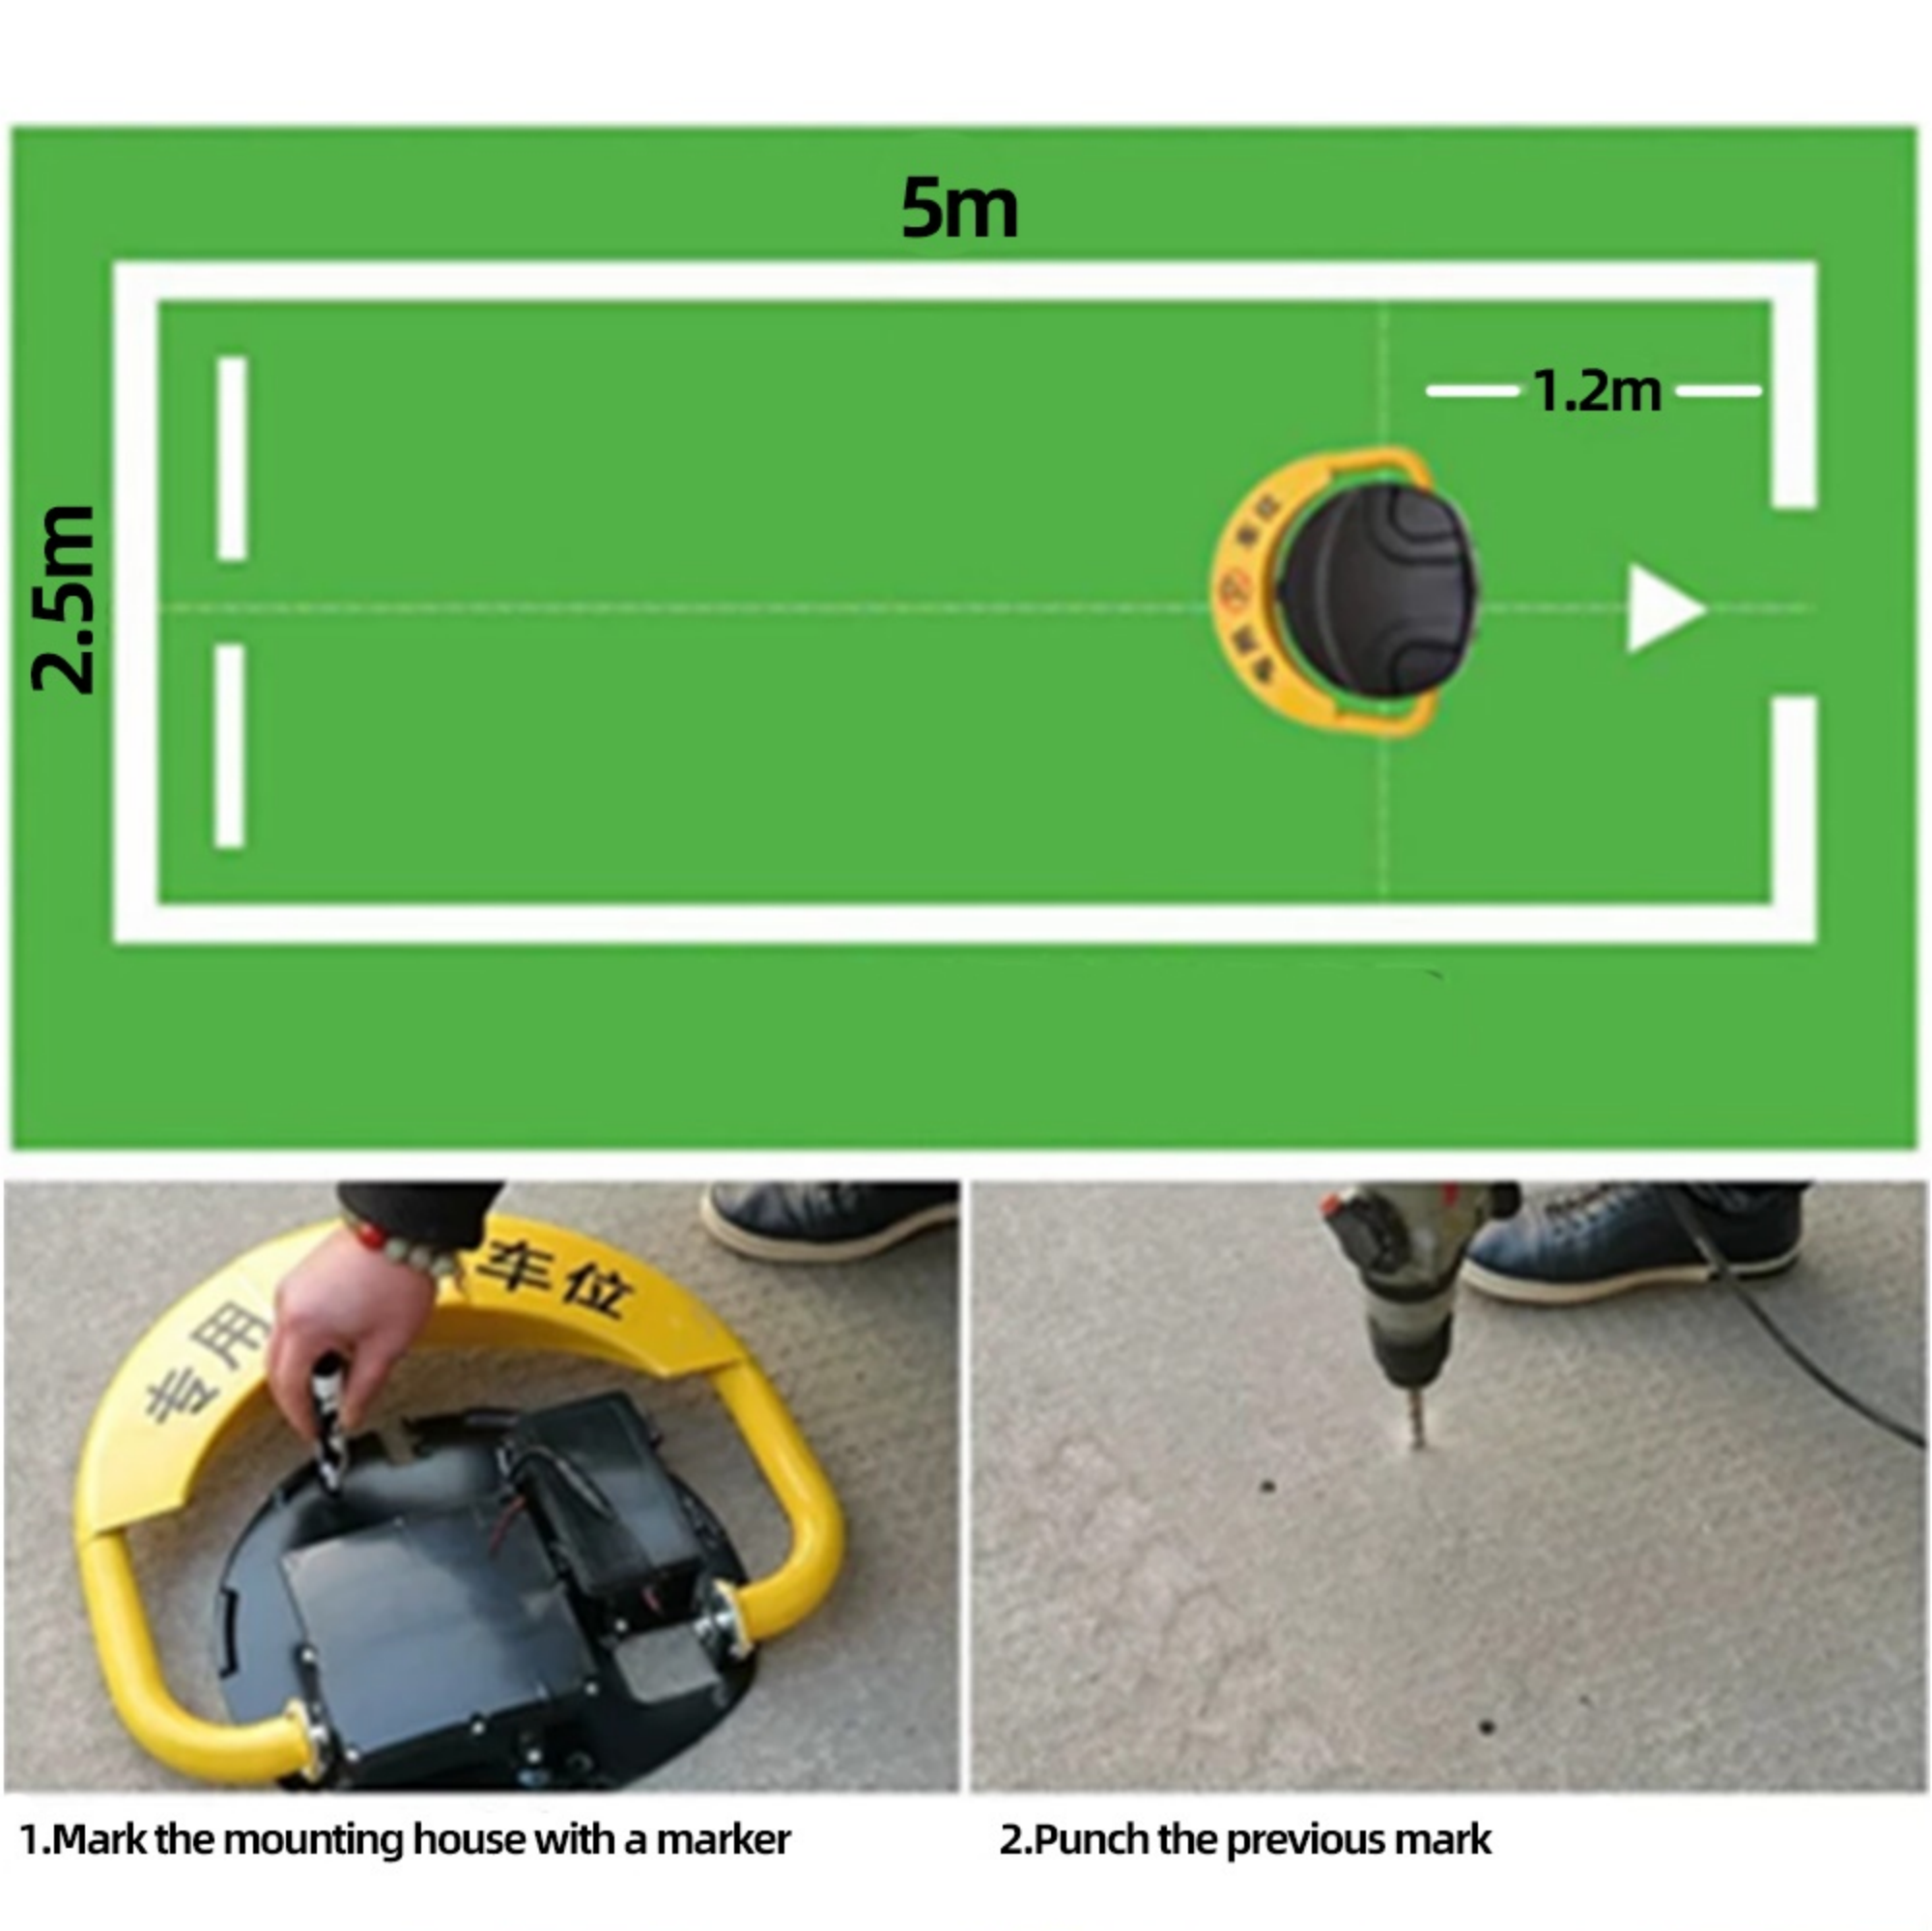

Installation Method

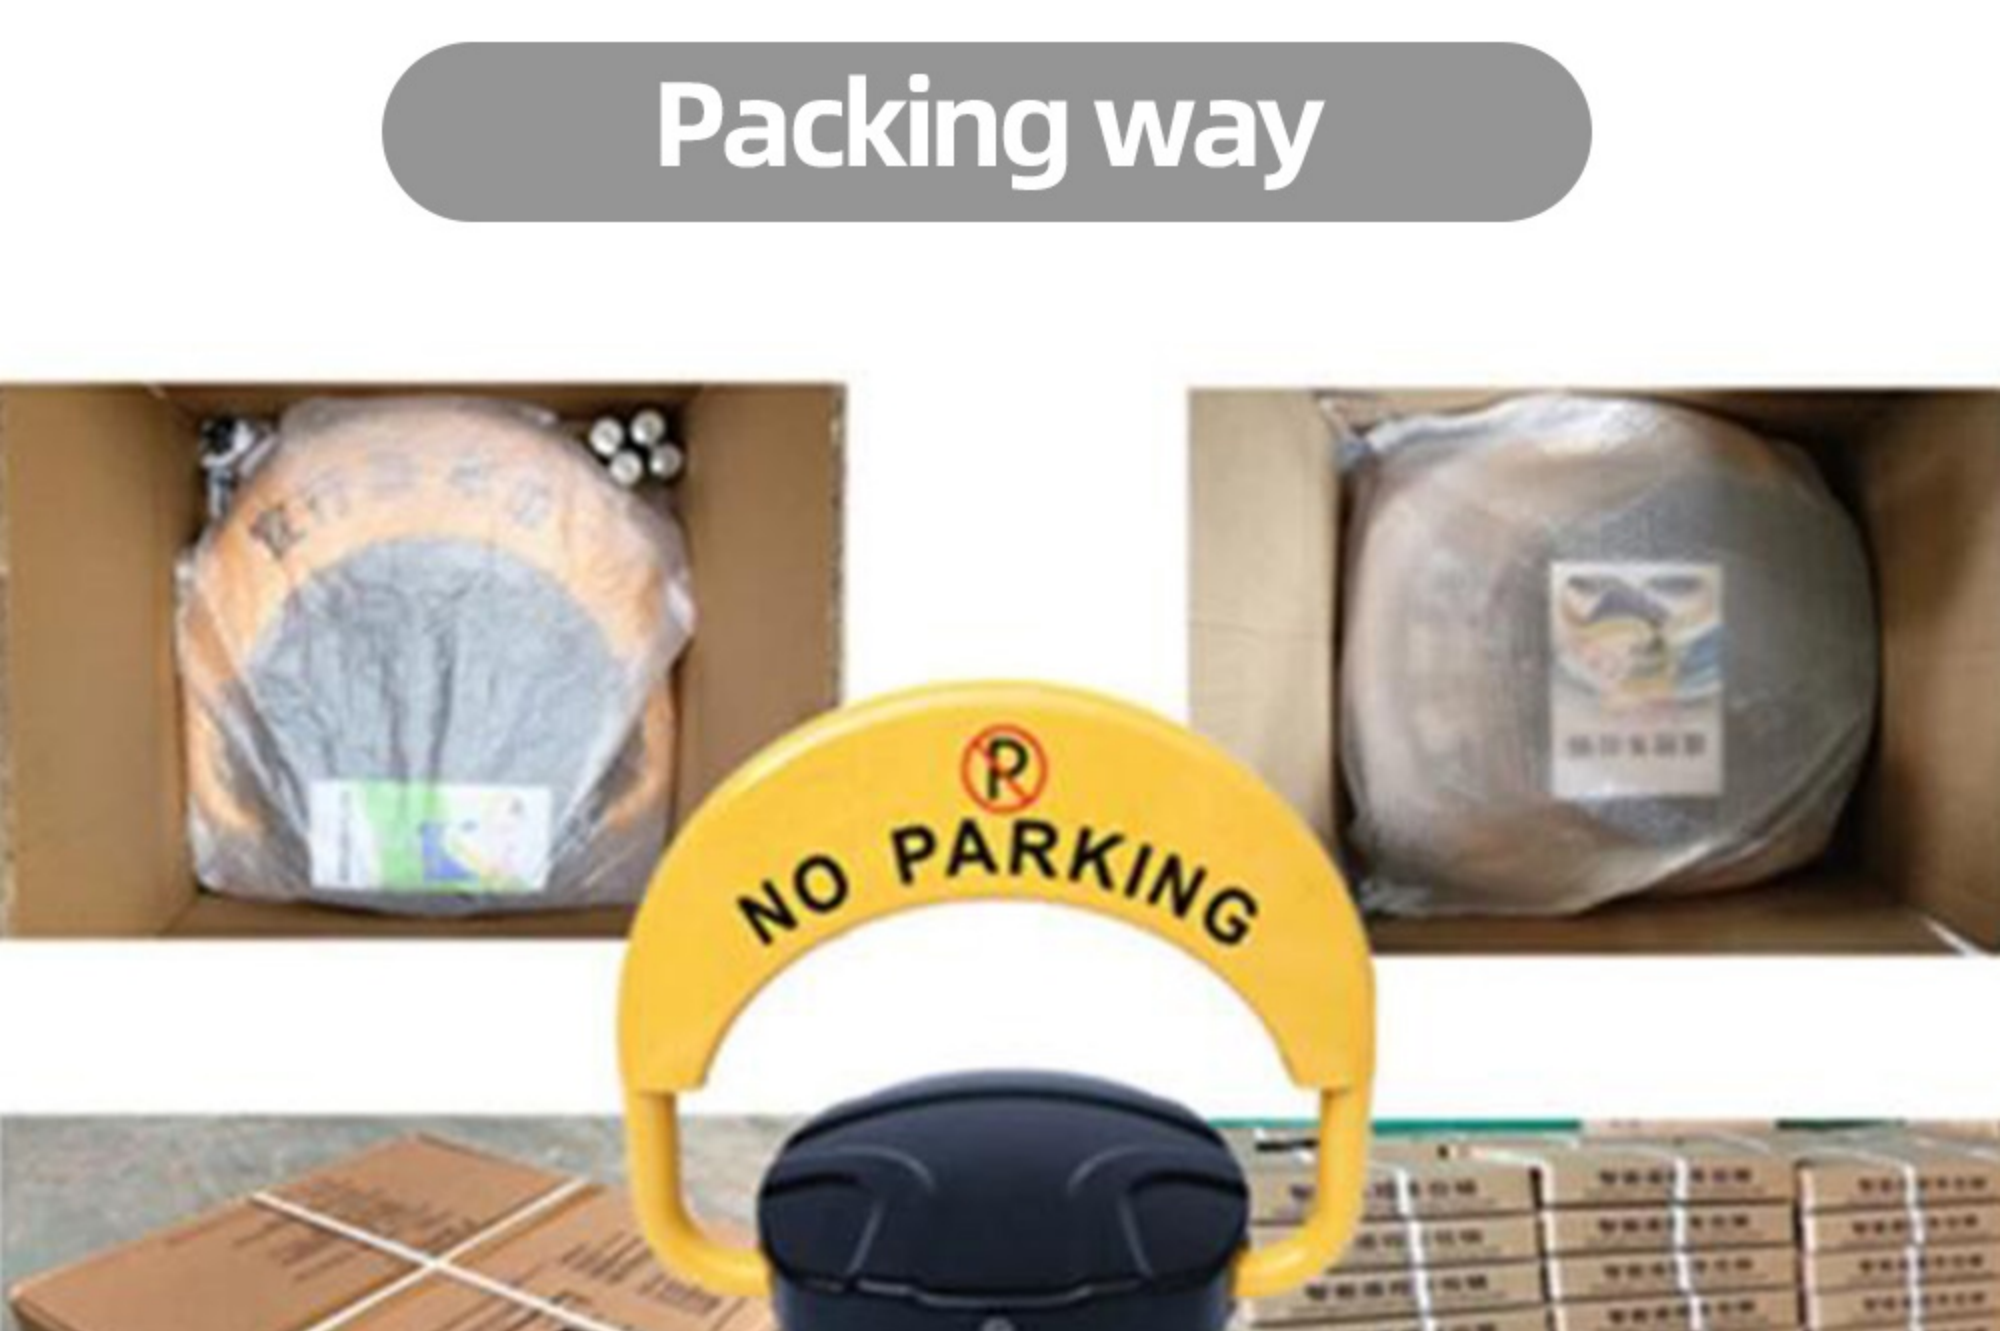

Packing way

Package details"
Standard export carton packing with foam protection. Shipping will be packed in wooden cases.

Delivery details:
2-6 working days after payment.